

Mark special individuals

This feature marks or displays certain special individuals in your genealogy such as implex families, tree top individuals, Y-DNA related people, etc.

The screenshot displays the Ancestris software interface. The main window shows a genealogy tree titled "Common ancestors between Philippe II CAPET and Françoise Marie DE BOURBON". The tree highlights several key figures, including Louis XIII CAPET, Louis XIV CAPET, and Philippe II CAPET. A detailed view of Philippe II CAPET is shown on the right, including a portrait, birth and death dates, and a list of events. The bottom panel shows a list of individuals and a table of events.

Common ancestors between Philippe II CAPET and Françoise Marie DE BOURBON

Arms: HABSBOURG
22 Sep 1631 - 20 Jan 1665
Louis XIII CAPET
27 Sep 1631 - 14 May 1643
Wedding 21 Nov 1615

Charlotte Elisabeth VON DER PFALZ-SIMMERN
21 May 1652 - 8 Dec 1722
Philippe I CAPET
21 Sep 1643 - 9 Jun 1731
Wedding 16 Nov 1671

Françoise D'AUBIGNE
27 May 1655 - 10 Apr 1719
Louis XIV CAPET
5 Sep 1638 - 1 Sep 1715
Wedding 10 Oct 1683

Françoise Marie DE BOURBON
4 May 1677 - 1 Feb 1748
Philippe II CAPET
2 Aug 1716 - 2 Dec 1723
Wedding 9 Jan 1692

12 Sep 1692

Philippe II CAPET
ID 113 Sosa 64 2.1 G5
Firstnames: Philippe I Lastname: CAPET
Male Female Unknown Private
CAPET, Philippe (*2: Sep 1640 + 9 Jun 1701) x15 Nov 1671 VON DER PFALZ-SIMMERN, Charlotte-Elis
CAPET, Philippe II (*2: Aug 1674 + 2 Dec 1723)
DE BOURBON, Françoise Marie (*4 May 1677 + 1 Feb 1748) x9 Jan 1692

Event Year Age
General 1674 -
Birth 1674 -
Marriage 1692 17.4
Occupation 1715 41.1
Death 1723 48.3

Marriage
Date: January 9 1692
Wednesday (age 17 years 5 months 7 days) Hour
Place: Versailles, 78546, Yvelines, Île-de-France, FRANCE
Notes
Sources
Nobody associated to this event

Description

At Ancestris, we have identified several types of populations in your genealogy that might be of great interest to you. They are listed in this window and described below.

Special individual marking

Special individuals

☐ Tree top individuals

☐ Tree bottom individuals

☐ Implex families

☐ Multiple ancestors

☒ Advanced research

Marking tag

_TREETOP

_TREEBOTTOM

_IMPLEX

_MULTANC

_MYSELECTION

Displayed value

To do: find parents

To do: find children

Married with cousin

Multiple ancestor

Selected individual

Y-DNA carriers of found individuals

Actions

☐ Erase
☒ Mark
☒ Display

OK

Cancel

- **Tree top individuals:** these are the individuals without parents at the top of the ascending tree of a given root individual taken as *De Cujus*.
- **Tree bottom individuals:** conversely, these are the individuals without children at the base of the tree descending from a root individual taken as a starting point. They can be single or married, and they do not have recorded descendant.
- **Implex families:** these are "couples of cousins", i.e. individuals forming a union and having at least one common ancestor. Their union generates the *implex*, that is to say a *reduction in the number of ancestors of their descendants*. They may or may not already have children identified in the genealogy.
- **Multiple ancestors:** these are the individuals who have implex families among their descendants. Each multiple ancestor can be a multiple ancestor of different couples.
- **Advanced research:** these are the individuals found and resulting from the **Advanced search**, or persons relating to them in a certain way. Hence we can choose to mark:
 - the found individuals themselves
 - the **parents** of the found individuals
 - the **children** of the found individuals
 - the **spouses** of the found individuals
 - the **ancestors** of the found individuals
 - the **descendants** of the found individuals
 - the **carriers of the Y-DNA** of the found individuals
 - the **carriers of the mt-DNA** of the found individuals
 - the **potential carriers of an X** chromosome of the found individuals

For each of these populations, Ancestris lets you define a user-defined tag to mark them and find them more easily later, for example in the Advanced search view itself. You can name the tag as you like. Ancestris will make sure it starts with the '_' character.

Ancestris also lets you define the value for that tag. The screen above suggests possible tags and values.

Finally, the check boxes at the bottom of the window let you choose whether to erase, mark, or display only the corresponding individuals.

Once the individuals are marked, you can see the tags in the **Gedcom editor**.

Usage

Marking individuals can be very useful to easily locate individuals and doing some analysis.

The tree top individuals and the tree bottom individuals represent the outer perimeter of your genealogical progress in terms of individuals.

- Tree top individuals are the ones from where you search for ancestors.
- Tree bottom individuals are the ones from where you search for descendants.

Implex families and multiple ancestors provide a better understanding of filiations in your genealogy.

As you can see in the following example, Ancestris quickly highlights you the implex couples in your genealogy and their relationships via their common ancestors, thanks to this tool combined with the **Common Ancestors** tool.

You can also see 5 tabs in the **Documents** window. The first one, "Special individual marking" is a summary of what was found and marked. Each of the other tabs corresponds to a special individual population.




To get there, first we have selected an individual in the genealogy. Then we have opened this "mark special individual" tool from the Edit menu, then we have checked the populations we were interested in, filled in the tags and values we wanted, and finally pressed OK.

The choice of a reference individual is only useful for tree top and tree bottom individuals. For implexes and multiple ancestors, Ancestris searches the entire genealogy.

For each of the special populations, Ancestris creates a tab in the Documents window.

What follows is a description of each population marking.

Tree top individuals

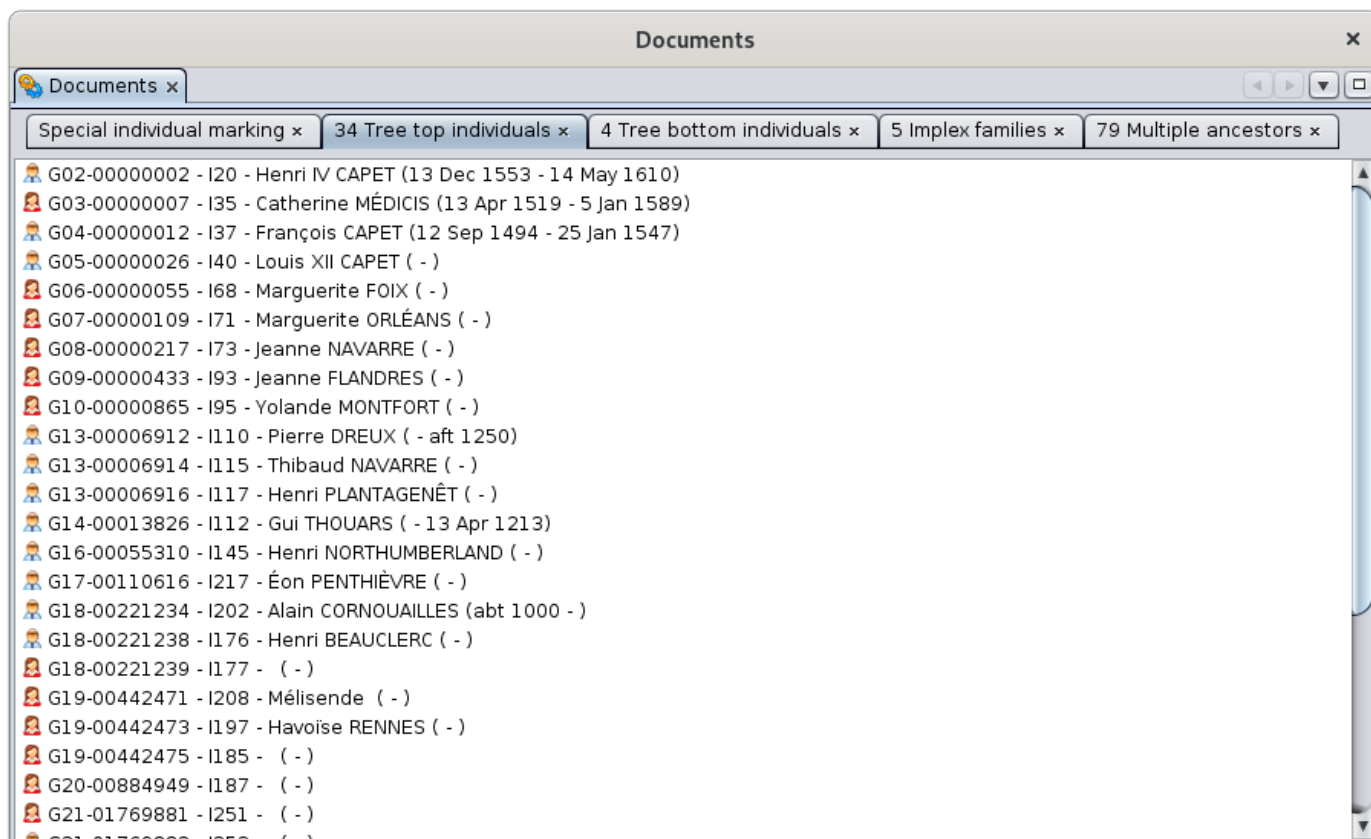


In the case of the Bourbon file used here, we asked for the marking and display of the top individuals after first selecting the individual Louis XIII.

Ancestris found 34 tree top individuals in the ascendant tree of Louis XIII. These individuals are listed in the tab. Just click on them to display them in the views of Ancestris.


Each individual name is preceded by a Sosa number generated for the occasion, but not stored in the genealogy. This number is constructed like the other Sosa numbers in Ancestris, that is to say with the generation number and the Sosa number itself.

The list is sorted in ascending order of Sosa number.

By clicking on one of the individuals and viewing it in the Gedcom editor, we see that the `_TREETOP` label has been added.

 `_TREETOP` To do: find parents

Tree Bottom Individuals

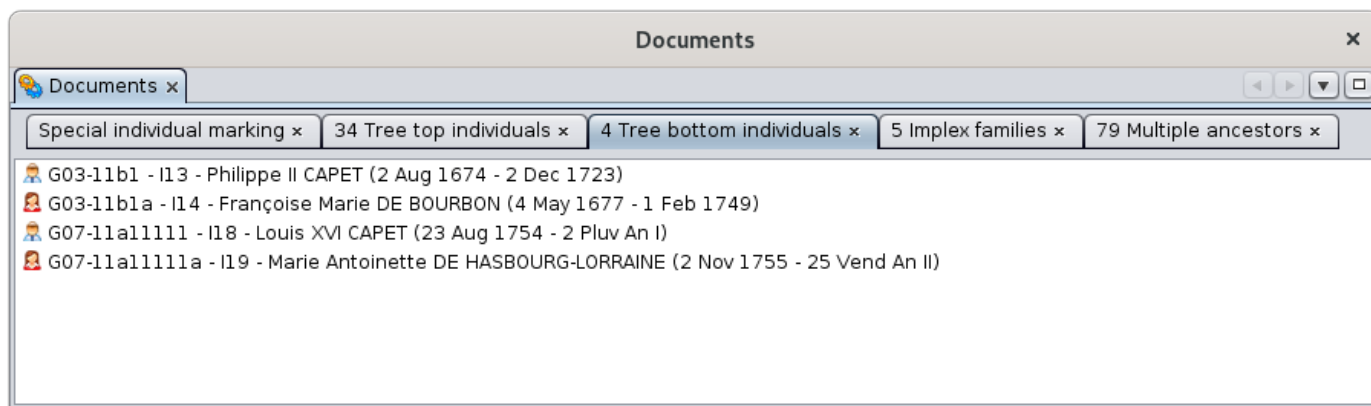


In the case of the Bourbon file used here, we requested the marking and display of tree bottom individuals by first selecting Louis XIII.

Ancestris found 4 individuals at the bottom of Louis XII descending tree. These individuals are listed in the tab. Just click on them to display them in the views of Ancestris.

Each individual name is preceded by a d'Aboville number generated for the occasion, but not kept in Gedcom. This number is constructed like the other Ancestris d'Aboville numbers, that is to say with the generation number and the actual d'Aboville number.


The list is sorted in ascending order of d'Aboville number.

By clicking on one of the individuals and viewing it in the Gedcom editor, we see that the `_TREEBOTTOM` tag has been added.

 `_TREEBOTTOM` To do: find children F10

For tree bottom individuals who belong to families without children, the family ID is added to the value of the tag, to make it easy for you to identify the family from the individual.

Implex families

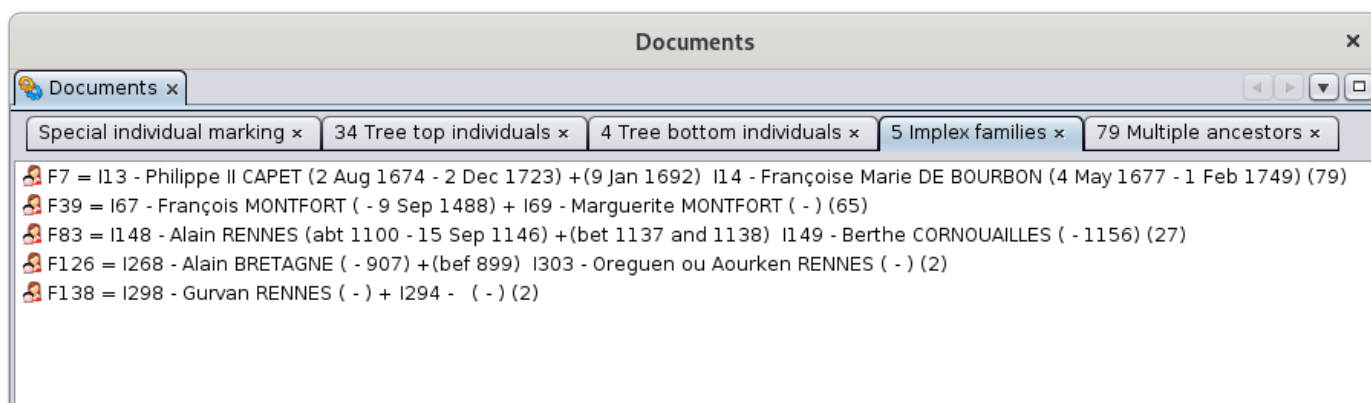


In the case of the Bourbon file used here, we requested the marking and display of the implex families. This marking does not require specifying a reference individual. The result of the marking tool is the same regardless of which individual is selected.

Ancestris found 5 implex families in the entire Bourbon genealogy provided. These families are listed in the tab. Just click on them to display them in the views of Ancestris.


Each family name is followed by a number between parentheses. This is the number of common ancestors to both members of the couple. Note that these individuals will be themselves in the Multiple Ancestors tab !

The list is sorted in descending order of the number of common ancestors.


By clicking on one of the families, the **Common Ancestors** viewing window appears and shows the visual path between one of the common ancestors and the two members of the couple.

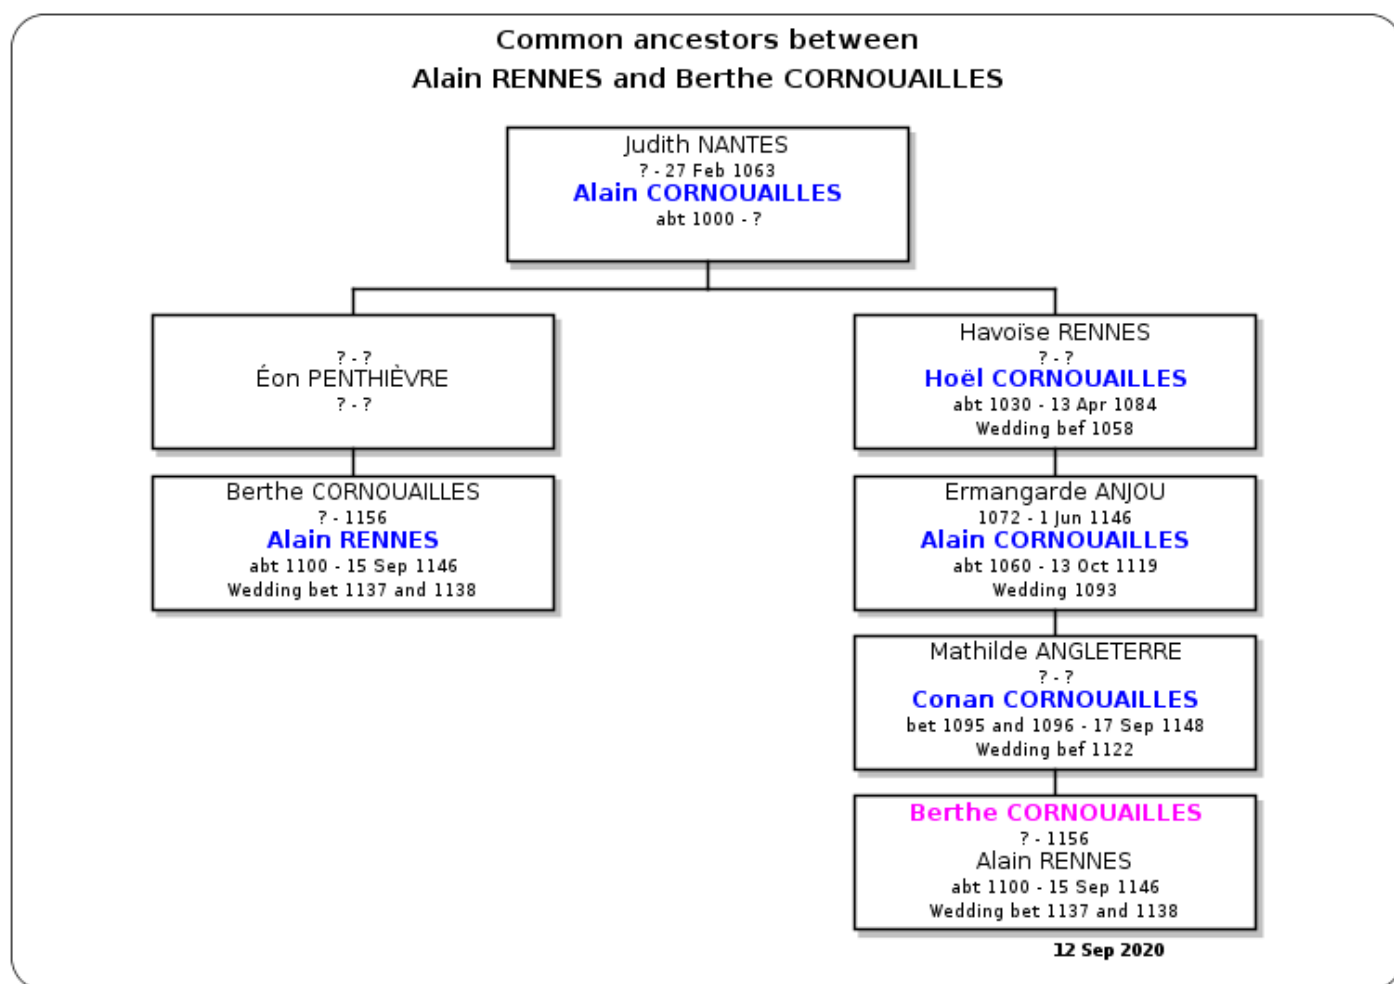

In the Gedcom editor, we see that the `_IMPLEX` tag has been added to the family, suffixed with the number of common ancestors.

 `_IMPLEX Married with cousin (79)`

Multiple ancestors

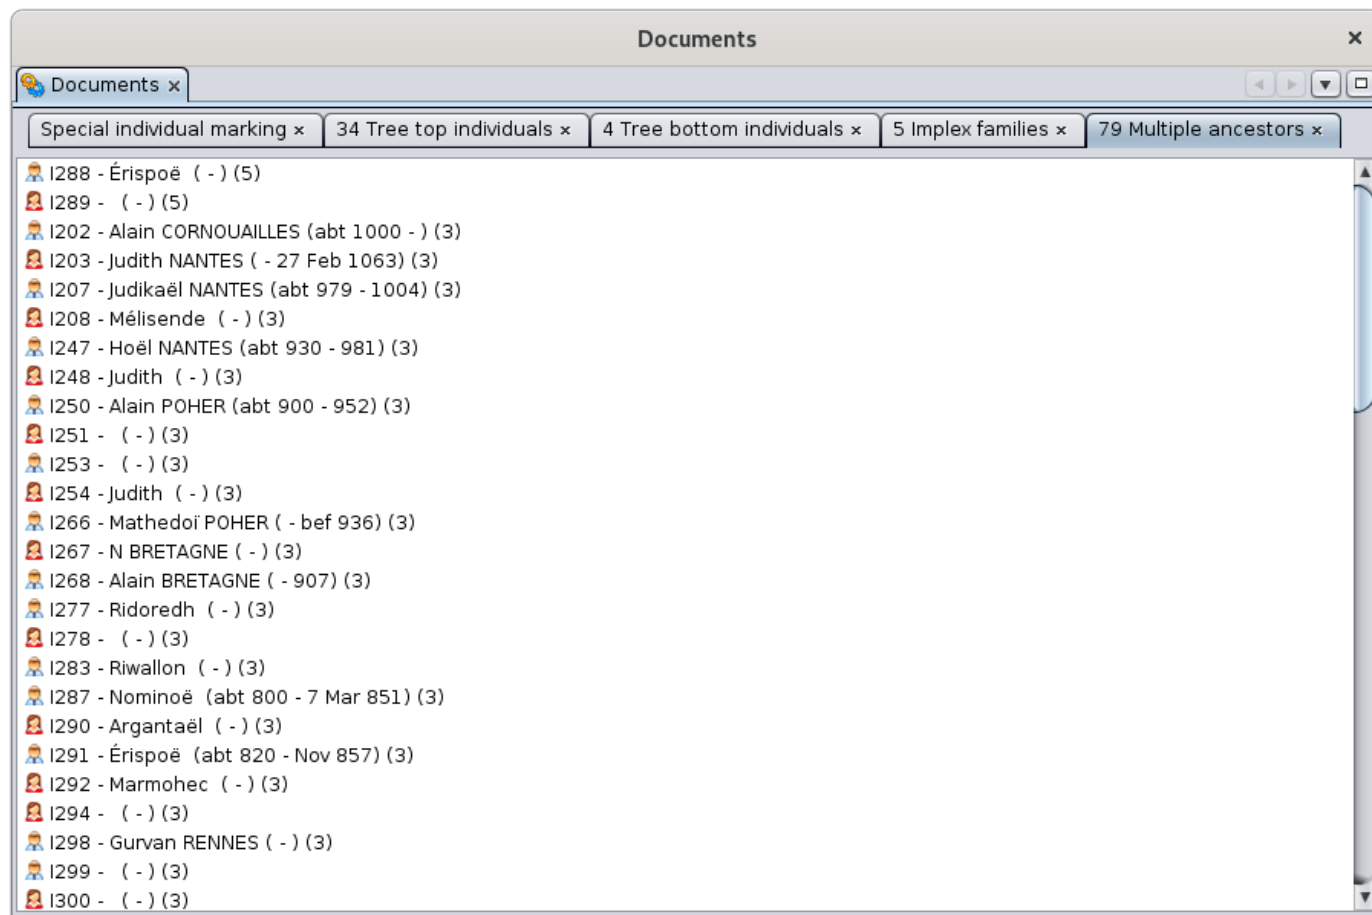

In the case of the Bourbon file used here, we requested the marking and display of multiple ancestors. This marking does not require to first select a reference individual.

Ancestris found 79 multiple ancestors throughout the Bourbon genealogy provided by Ancestris. These individuals are listed in the tab. Just click on them to display them in the views of Ancestris.

Each individual name is followed by a number in parentheses. This is the number of couples among its descendants who are implex families. Note that these families will be in the previous Implex families tab.

The list is sorted in descending order of the number of these implex families.

Clicking on one of the individuals displays it in the views of Ancestris. In the Gedcom editor, we see that the `_MULTANC` tag has been added to the individual, followed by the list of all the descending implex families.

 `_MULTANC` Multiple ancestor (F7)

Multiple ancestors are displayed in black if they are related to the current *De Cujus* of the genealogy - that is to say, they hold a `_SOSA` or `_SOSADABOVILLE` tag, or they are displayed in purple otherwise.

Advanced search

The screenshot shows the Ancestris software interface. On the left, the 'Multi-Criteria' search panel is active, showing search criteria for 'Bourbon'. The criteria include Lastname, Firstname, Birth, Death, Place, and Occupation (set to 'abbesse'). The results list 6 individuals: PENTHIÈVRE, Enoquen (° +1187) (I156); PORHÉT, Adélaïde (° +1244) (I165); DREUX, Aliénor (° +1342) (I167); MONTFORT, Marie (° +1477) (I168); de CORNOUAILLES, Adèle (° +14 Oct 1152) (I200); and CORNOUAILLES, Hodiern (° +) (I214). On the right, the 'Special individual marking' tab is active, showing a list of 11 individuals and their parents. The list includes: PLANTAGENET, Béatrice (° +) (I107); RENNES, Alain (°abt 1100 +15 Sep 1146) (I148); d' ORLÉANS, Marguerite (° +) (I71); de CORNOUAILLES, Alain (°abt 1000 +) (I202); de CORNOUAILLES, Berthe (° +1156) (I149); de CORNOUAILLES, Hoël (°abt 1030 +13 Apr 1084) (I196); de DREUX, Jean (°3 Jan 1239 +18 Nov 1305) (I106); de MONTFORT, Richard (° +1438) (I70); de NANTES, Judith (° +27 Feb 1063) (I203); de PORHÉT, Eudon (° +1186) (I157); and de RENNES, Havoise (° +) (I197). A yellow highlight is visible on the 'Advanced research for Bourbon | Parents of found individuals' tab.


In the case of the Bourbon file used here, we asked for the marking of the parents of individuals who had an occupation of Abbess.

In the **Advanced search**, we have selected the Abbesses individuals. Then in the marking tool, we have checked Advanced search and chose the relation "Parents of individuals found" in the dropdown list.

Ancestris found 6 abbesses in the Advanced search, who have together 11 parents as we can see in the marking tools.


The individuals are sorted in alphabetical order.

Clicking on one of the individuals displays it in the views of Ancestris. In the Gedcom editor, we see that the `_MYSELECTION` tag has been added to the individual, followed by the value defined.

 `_MYSELECTION` Selected individual

Special individual marking tab

In order for you to know the marking request you did, the first tab generated is a summary of your request and the list of results.

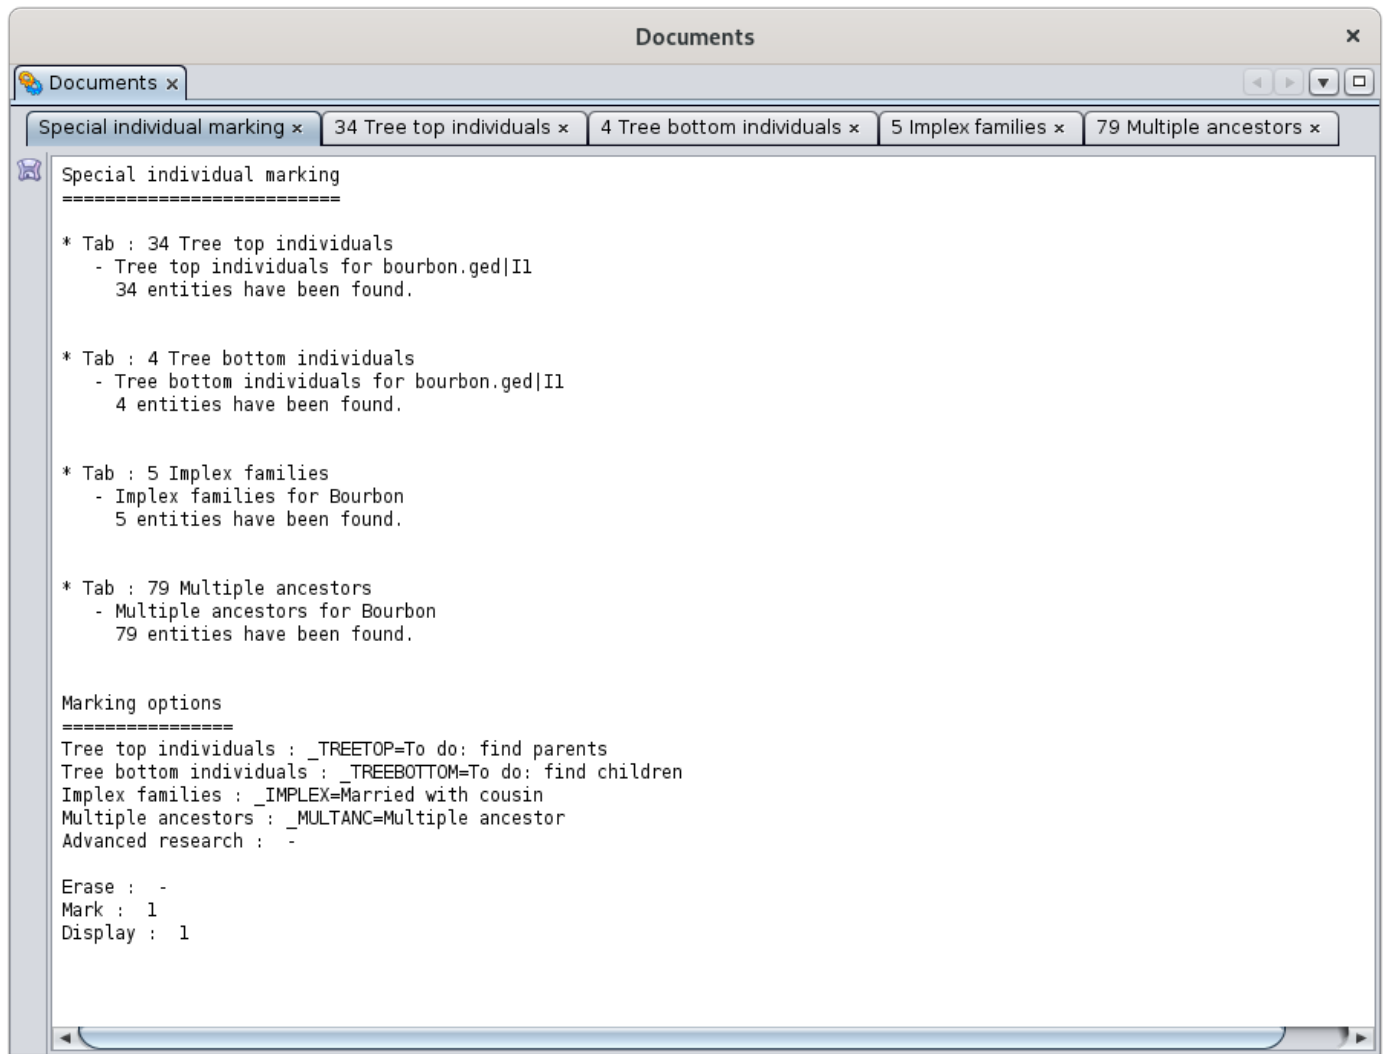

Customization

There is no specific customization for this tool.

Revision #1

Created 14 November 2021 14:33:05 by frederic

Updated 3 June 2023 14:56:43 by frederic